

# DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:


Order:

Project:

Requirements:

By:

Date:

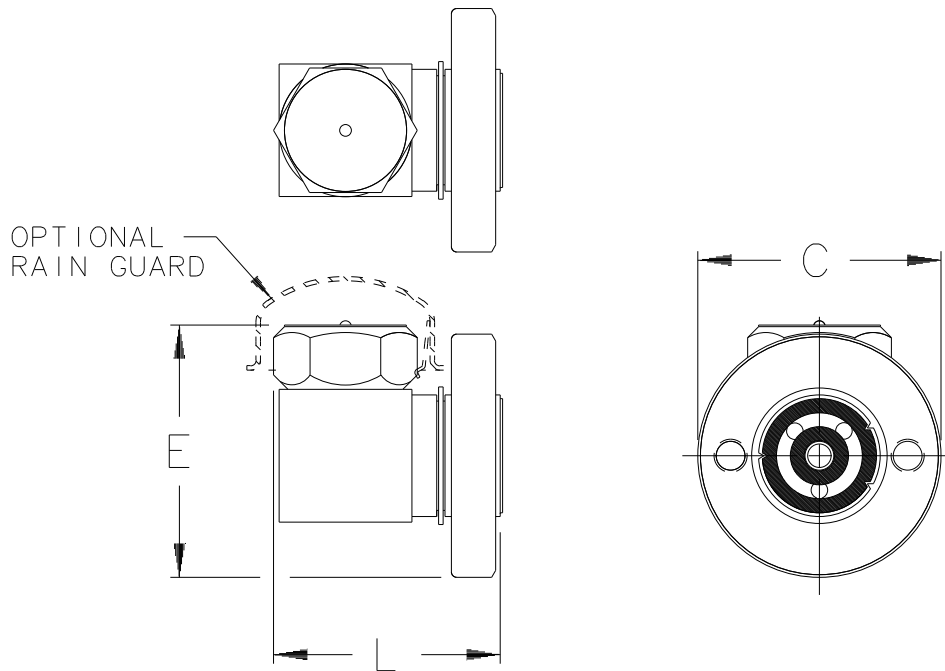


Dimensions Are In Inches[mm]

MODEL NO.	CD-3300
CONNECTIONS	UNIVERSAL CONNECTOR BLOCK OR IS2 CONNECTOR OR TVS4000 CONNECTOR
"C" (FLG. DIA)	ø2-3/4[67]
"L" (OVERALL LENGTH)	2-9/16[65]
"E" (OVERALL HEIGHT)	2-7/8[72]
WEIGHT lbs[kgs]±1/4[.11]	2.1[.95]
MAX. OPERATING PRESSURE	450 psi[31 bar] at 456°F[236°C]
MAXIMUM ALLOWABLE PRESSURE (VESSEL DESIGN)	720 psi[50 bar] at 750°F[400°C]

LIST OF MATERIALS:	
NAME OF PART	MATERIAL
CAP	ASTM A743 CA40
DISC	420 STN. STL. UNS# S42000
BODY	420 STN. STL. UNS# S42000
NAME PLATE	303 STN. STL.
RAIN GUARD (OPTIONAL)	304 STN. STL.

OPTIONS
RAIN GUARD <input type="checkbox"/>

 Armstrong International, Inc. Three Rivers Division Three Rivers, MI 49093 <b>Armstrong</b> (269) 273-1415 Fax(616) 273-9500 Posted on Armstrong's homepage <a href="http://www.armstrong-intl.com">www.armstrong-intl.com</a>		
Product	CD No.	Date
TRAP CD-3300 L/ CONNECTOR	1281	04/06/04
		Rev. A