


APPROVED DRAWING

DRAWING APPROVED: PROCEED WITH FABRICATION
BY Charlie Thomas DATE 6-20-11
CHANGES OTHER THAN THOSE BY OUR
ERROR ARE SUBJECT TO A CHANGE.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Original Drawing	9-11-01	
	2	rotated air vent	10-14-02	
	3	rotated vent discharge	10-25-10	
	4	added installation note	6-20-11	

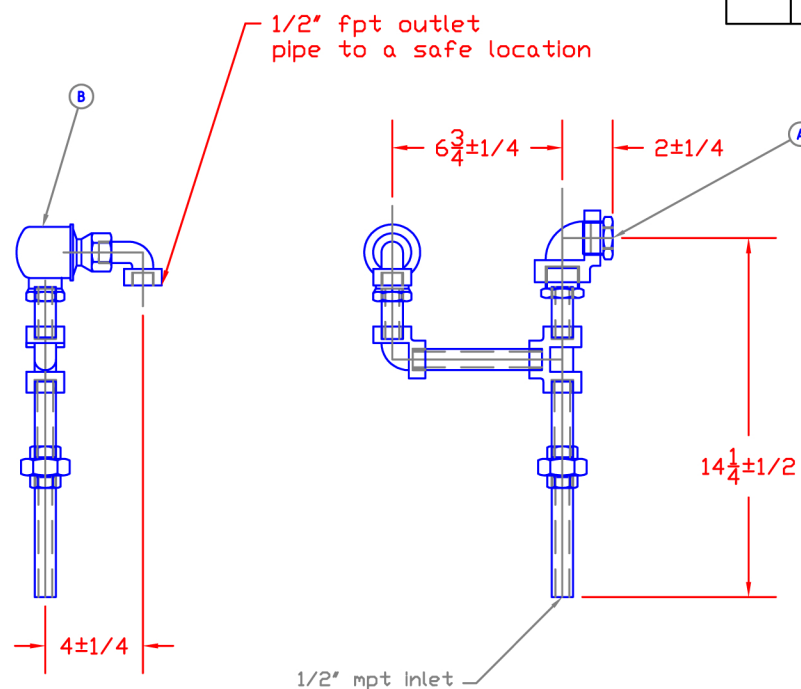

INSTALL VERTICALLY AS SHOWN

B	1	1/2" TTF-1R THERMOSTATIC AIR VENT	300# SS
A	1	1/2" x 1" DURABLA VACUUM BREAKER	SS
ITEM	QTY	DESCRIPTION	MATERIAL

- Notes:
1. All fittings shall be 2000#/3000# forged steel threaded
 2. All pipe shall be XH A106-B seamless threaded
 3. All joints shall be sealed with teflon tape and teflon pipe dope



Campbell-Sevey, Inc.

HP air vent/VB assy

Do Not Duplicate
unless prior written approval has been obtained from a
qualified representative from Campbell-Sevey, Inc.
(952) 935-2345

SIZE	FSCM NO.	DWG NO.	REV
B		09-11-2001-A	4
SCALE none		SHEET	