

DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:


Order:

Project:

Requirements:

By:

Date:

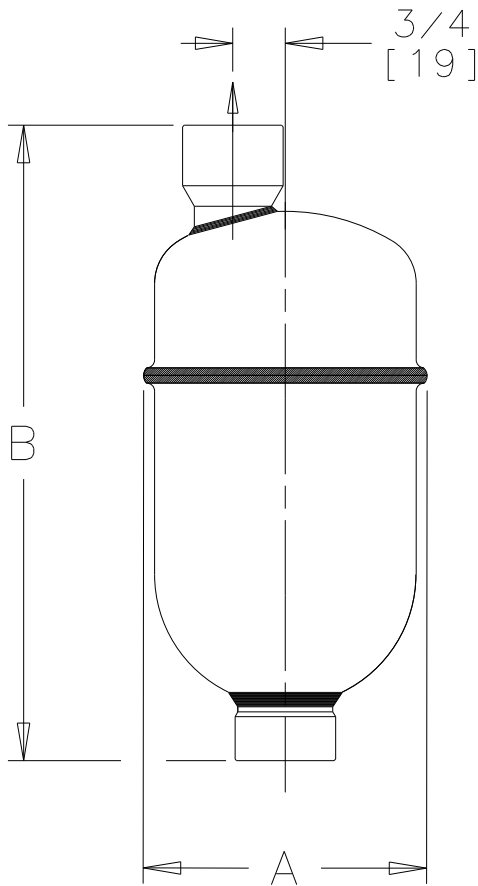

Dimensions Are In Inches [mm]

LIST OF MATERIALS:

NAME OF PART	MATERIAL
CAP & BODY	ASTM A167 T304L SS
MECHANISM SUPPORT	ASTM A479 T304 SS
VALVE SEAT/VALVE	ASTM A582 T440F SS
BUCKET	ASTM A167 T304 SS
RETAINER, VALVE	ASTM A167 T302 SS
LEVER	CARPENTER 20Cb-3 SS
GUIDE PLATE ASS'Y	ASTM A240 T304 SS

TECHNICAL INFORMATION

MODEL NO.	1022	
CONNECTIONS	NPT & SW	SW
	1/2 [DN15]	1/2 [DN15]
	3/4 [DN20]	3/4 [DN20]
"A" (BODY ϕ)	3-7/8 [98]	
"B" (HEIGHT)	8-3/4 [222]	8-9/16 [217]
WEIGHT	3-1/2 lbs [1.6 kgs]	

OPTIONS:

CONNECTIONS - NPT, BSPT Or SW		
NPT		
BSPT		
SW		

DESIGN INFORMATION

MAXIMUM ALLOWABLE PRESSURE (VESSEL DESIGN)	650 psig at 600°F [45 bar at 315°C]
MAXIMUM OPERATING PRESSURE	650 psig [45 bar]



Armstrong International, Inc.
Three Rivers Division
Three Rivers, MI 49093

Armstrong (269) 273-1415 Fax(269) 278-6555
Posted on Armstrong's homepage www.armstronginternational.com

Product

CD No.

Date

TRAP
1022

1204

4/30/02

Rev: B

By: Paul G.