

DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:



Order:

Project:

Requirements:

By:

Date:

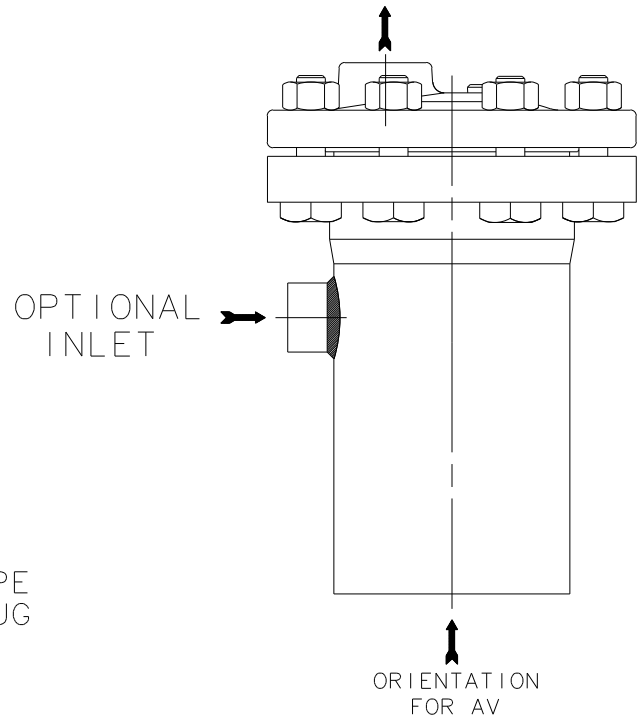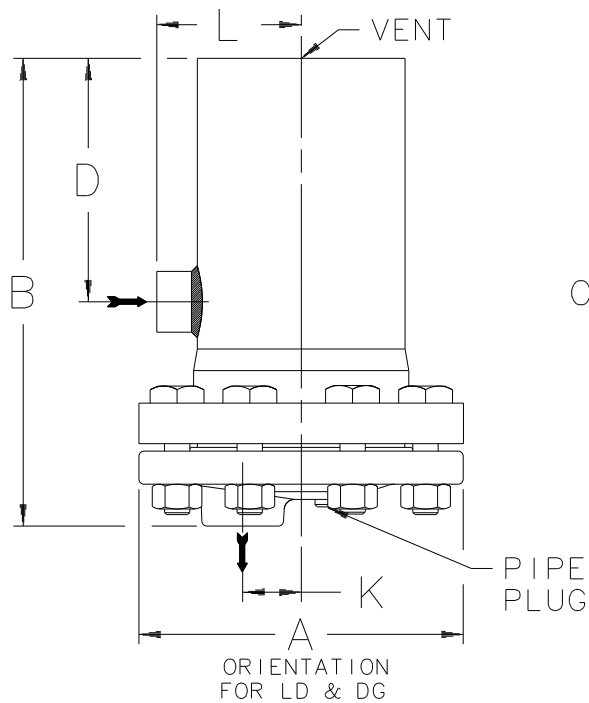

MODEL NO.	32-AV/LD/DG	33-AV/LD/DG	36-AV/LD/DG
PIPE CONNECTION	1/2[15] 3/4[20] 1*[25]	1/2[15] 3/4[20] 1*[25]	1-1/2, 2
A (FLANGE DIA)	6-3/4 [171]	8 [203]	11-7/8 [302]
B (HEIGHT)	10-3/16 [259]	11-9/16 [294]	17-1/8 [435]
D (BOTTOM TO Ø INLET)	5-9/16 [141]	6-1/16 [154]	9 [229]
K (Ø OF TRAP OUTLET)	1-1/4 [32]	1-7/16 [37]	2-1/8 [54]
L (Ø OF TRAP TO INLET)	3-3/8 [86]	3-7/8 [98]	6-1/16 [154]
WEIGHT (LBS.)	31 lbs [14 kgs]	49 lbs [22 kgs]	163 lbs [74 kgs]
PIPE PLUG	1/2 NPT		
MAXIMUM ALLOWABLE PRESSURE (VESSEL DESIGN)	600 psig(100°F) 500 psig(750°F)	1000 psig(100°F) 600 psig (750°F)	

DESCRIPTION	MATERIAL
BODY & CAP	ASTM A105 STEEL
VALVE	HARDENED STAINLESS STEEL
SEAT	
LEVER ASS'Y	STAINLESS STEEL
FLOAT	STAINLESS STEEL
GASKET	COMPRESSED NON-ASBESTOS

NOTES:

1. AVAILABLE IN NPT, BSPT, SW & FLG CONNS.
2. AVAILABLE IN T316 SS
3. DIMENSIONS ARE IN INCHES[MM]



Armstrong International, Inc.
Three Rivers Division
Three Rivers, MI 49093

Armstrong (269) 273-1415 Fax(269) 278-6555
Posted on Armstrong's homepage www.armstrong-intl.com

Product	CD No.	Date
32-AV/LD/DG	1035	6/15/06
33-AV/LD/DG		Rev. B
36-AV/LD/DG		