

# DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:


Order:

Project:

Requirements:

By:

Date:

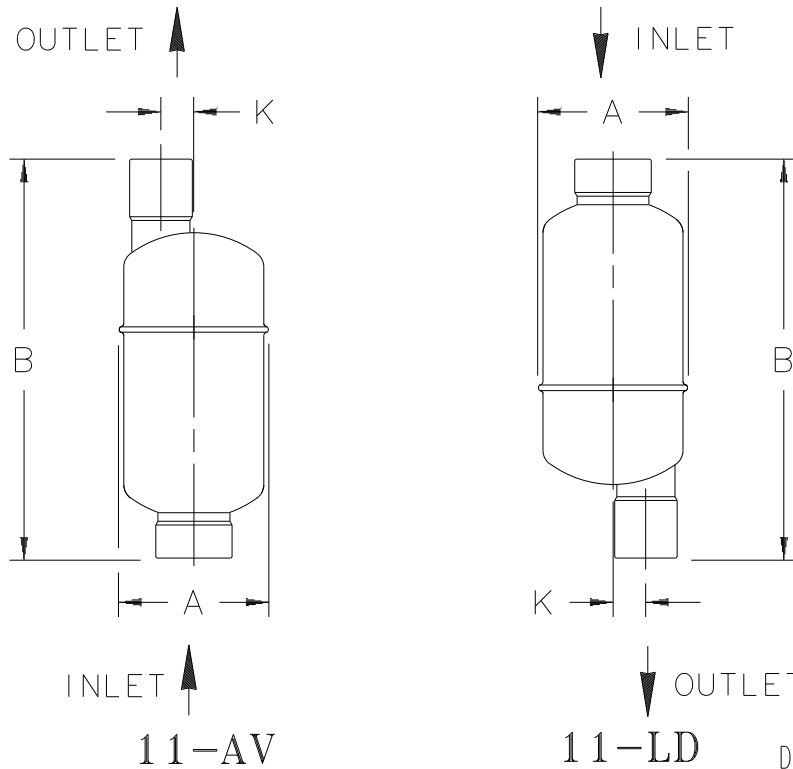

MODEL NO.	11-AV/LD				
PIPE CONNECTIONS	INLET	3/4 NPT[DN20]	1/2 NPT[DN15]	3/4 SW[DN20]	1/2 SW[DN15]
	OUTLET	1/2 NPT [DN15] OR 1/2 SW[DN15]			
"A" (BODY DIAMETER)	2-3/4 [70 mm]				
"B" (HEIGHT)	7-1/4[184mm]	7-13/32[188mm]	6-5/8[168mm]	6-3/4[171mm]	
"K" (Ø OF TRAP TO Ø OUTLET)	9/16" [14 mm]				
WEIGHT	1-3/4 lbs [.80 kgs]				
MAXIMUM ALLOWABLE PRESSURE (VESSEL DESIGN)	500 psig at 100°F [34 bar at 38°C] 440 psig at 500°F [30 bar at 260°C]				

OPTIONS:	
CONNECTIONS	NPT <input type="checkbox"/>
	BSPT <input type="checkbox"/>
	SOCKET WELD <input type="checkbox"/>

LIST OF MATERIALS	
NAME OF PART	MATERIAL
CAP & BODY	304-L STN. STL.
VALVE SEAT	HARDENED STAINLESS STEEL
VALVE	
LEVER ASS'Y	
FLOAT	STAINLESS STEEL

Armstrong International, Inc.  
 Three Rivers Division  
 Three Rivers, MI 49093  
**Armstrong** (269) 273-1415 Fax(269) 278-6555  
 Posted on Armstrong's homepage [www.armstrong-intl.com](http://www.armstrong-intl.com)

Product	CD No.	Date
11-AV/LD	1066	6/19/01
		Rev. C