

DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:


Order:

Project:

Requirements:

By:

Date:

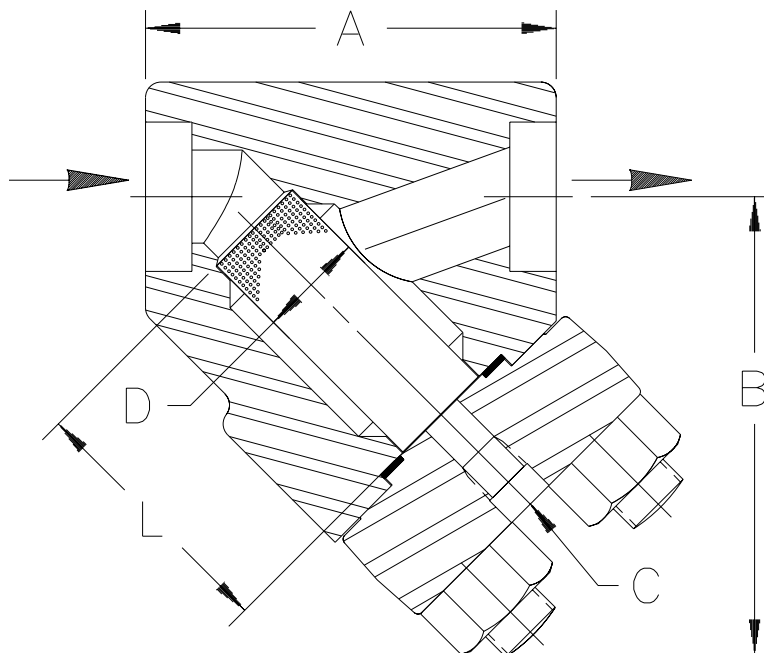

2" Strainer shown above


D1SW

Dimensions A & B $\pm 1/8"$ [3mm]

DESCRIPTION	DIMENSIONS					
CONNECTION (SW)	1/2" [DN15]	3/4" [DN20]	1" [DN25]	1-1/4" [DN32]	1-1/2" [DN40]	2" [DN50]
"A" (FACE TO FACE)	5-1/8" [130mm]			6-5/8" [168mm]		
"B" (BOTTOM TO ϕ INLET)	3-9/16" [90mm]			7-3/8" [187mm]		
"C" (BLOW DOWN)	1/2" SW [DN15]					
"D" (DIA. OF SCREEN)	1-3/16" [30mm]			1-23/32" [44mm]		
"L" (LENGTH OF SCREEN)	2-15/16" [75mm]			4-1/4" [108mm]		
WEIGHT	26 lb [11.8 kgs]			56 lb [25.4 kgs]		
MAXIMUM ALLOWABLE PRESSURE (VESSEL DESIGN)	2500 psig at 1025°F [172 bar at 552°C] 6000 psig at 100°F [414 bar at 37.8°C]					

LIST OF MATERIALS

NAME OF PART	MATERIAL
BODY & RETAINER	ASTM A182 GR. F22
SCREEN	T304 SS .045" PERF.
GASKET	SPIRAL WOUND SS, NON-ASBESTOS
STUD	ASTM A193 GR. B16
NUT	ASTM A194 GR. 2H



Armstrong International, Inc.
Three Rivers Division
Three Rivers, MI 49093
Armstrong (616) 273-1415 Fax(616) 278-6555

Product	CD No.	Date
STRAINER, D1SW 1/2" - 2" FORGED STEEL F22	1059	2/5/97
		Rev. A