

DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:

Order:


Project:

Requirements:

By:

Date:

DIMENSIONS & SPECIFICATIONS				
Connection Size	1/4", 3/8" & 1/2" NPT	3/4" NPT	1", 1-1/4" & 1-1/2" NPT	2" NPT
L	2-3/4" [70mm]	3-1/2" [89mm]	4-1/4" [108mm]	6.0" [152mm]
H	5-1/8" [130mm]	5-7/8" [149mm]	7-1/8" [181mm]	9-3/4" [248mm]
H ₁	1-1/2" [38mm]	1-1/2" [38mm]	2-3/8" [60mm]	3-9/16" [90mm]
Weight	1-1/2 lbs. [0.7 kgs]	2 lbs. [0.9 kgs]	3 lbs. [1.4 kgs]	10 lbs. [4.5 kgs]
Cv [Kv]	1.4 [1.2]	2.6 [2.2]	5.8 [5.0]	43 [37]
Inlet Pressure	15-300 psig [1-20 bar]			
Reduced Pressure	5-125 psig [.34-8.5 bar]			
Min. Differential	7 psig [.48 bar]			
Max. Temperature	175 °F [79 °C]			
Application	Air and Other Non-Corrosive Gasses			

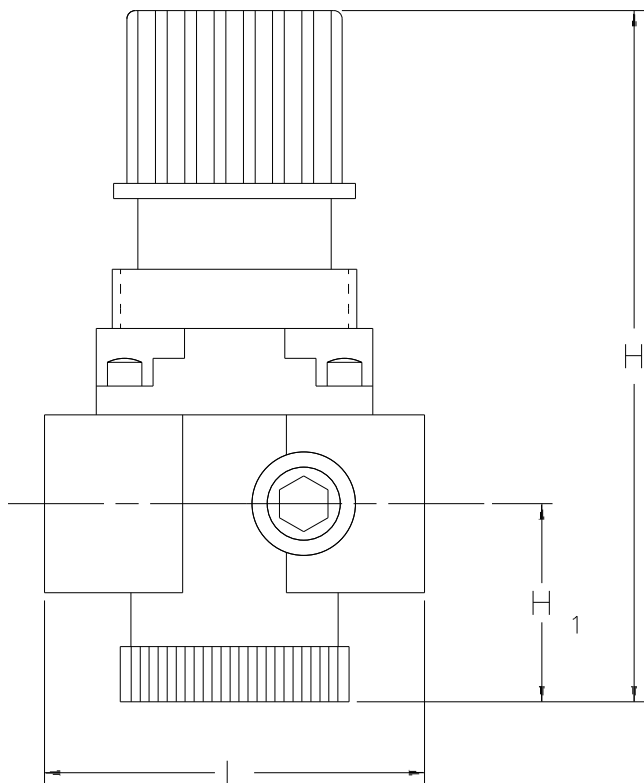

LIST OF MATERIALS		
Conn. Size	1/4" 3/8" 1/2" 3/4"	1" Thru 2"
Body	Zinc	Aluminum
Main Valve	Zinc	Aluminum
Valve Plug	Brass	Nylon
Diaphragm	Nitrile	Nitrile


 Armstrong Pressure/Temperature Group
 221 Armstrong Blvd.,
 Three Rivers, MI. 49093
Armstrong (269) 279-3600 Fax(269) 273-8656
 Posted on Armstrong's homepage www.armstrong-intl.com

Product	CDY No.	Date
GD-10 PRESSURE REDUCING VALVE	1003	1/16/98
		Rev. B