

DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:


Order:

Project:


Requirements:

By:

Date:

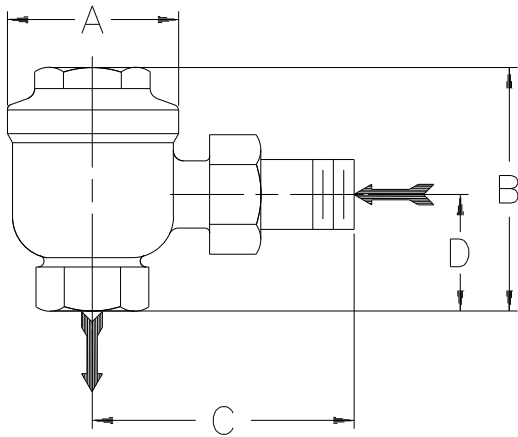

ANGLE

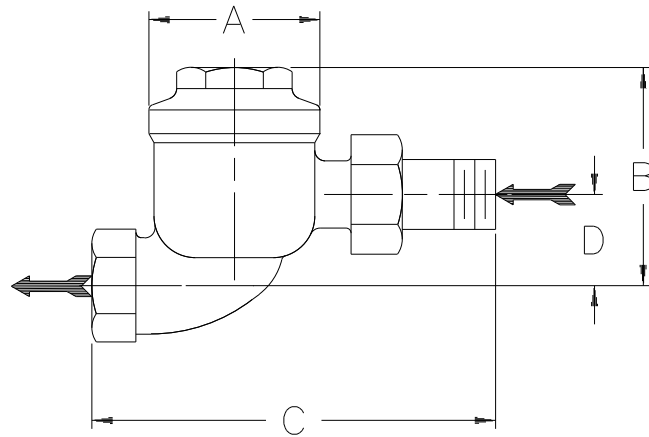


STRAIGHT

Dimensions						
Pattern	Angle			Straight		
Connection Size	1/2" [15]	3/4" [20]	1" [25]	1/2" [15]	3/4" [20]	1" [25]
"A"	2" [51mm]	2" [51mm]	2-3/8" [60mm]	2" [51mm]	2" [51mm]	2-3/8" [60mm]
"B"	2-7/8" [73mm]	3-5/8" [92mm]	3-7/8" [98mm]	2-5/8" [67mm]	3-3/8" [86mm]	3-1/2" [89mm]
"C"	3-1/8" [79mm]	3-1/2" [89mm]	4-1/8" [105mm]	4-7/8" [124mm]	5-1/4" [133mm]	6-1/2" [165mm]
"D"	1-3/8" [35mm]	1-5/8" [41mm]	2" [51mm]	1-1/8" [29mm]	1-3/8" [35mm]	1-5/8" [41mm]
Weight	1-1/2 lbs [0.7 kgs]	2 lbs [0.9 kgs]	2-1/2 lbs [1.1 kgs]	1-1/2 lbs [0.7 kgs]	2-1/4 lbs [1 kgs]	3 lbs [1.4 kgs]

Materials	
Cap	Bronze, ASTM B-62
Body	Bronze, ASTM B-62
Union Nipple	Bronze, ASTM B-584
Valve	Stainless Steel
Valve Seat	Stainless Steel
Element	Stainless Steel

Specifications	
Maximum Allowable Pressure (Vessel Design)	65 psig at 315 °F [4.4 bar at 157 °C]
Pressure	65 psi [4.4 bar]



Armstrong Pressure/Temperature Group
221 Armstrong Blvd.,
Three Rivers, MI. 49093
Armstrong (269) 279-3600 Fax(269) 273-8656
Posted on Armstrong's homepage www.armstrong-intl.com

Product	CDY No.	Date
TS-3 RADIATOR TRAP	1046	3/06/98
		Rev. B