

# Water Temperature Control - Single Point of Use



## Digital

### Sense™ Model DMV2


Concealed digital mixing valve with surface mount control panel for **individual shower** flow and +/-2°F (+/-1°C) temperature control.

### Operational Specifications

- Programmable timed flow
- No touch on/off flow control
- No touch temperature adjustment
- Programmable minimum/maximum temperature access limits
- Programmable service flush
- Programmable thermal disinfection mode
- Data logging capabilities



For a submittal drawing, refer to CDLW1148.

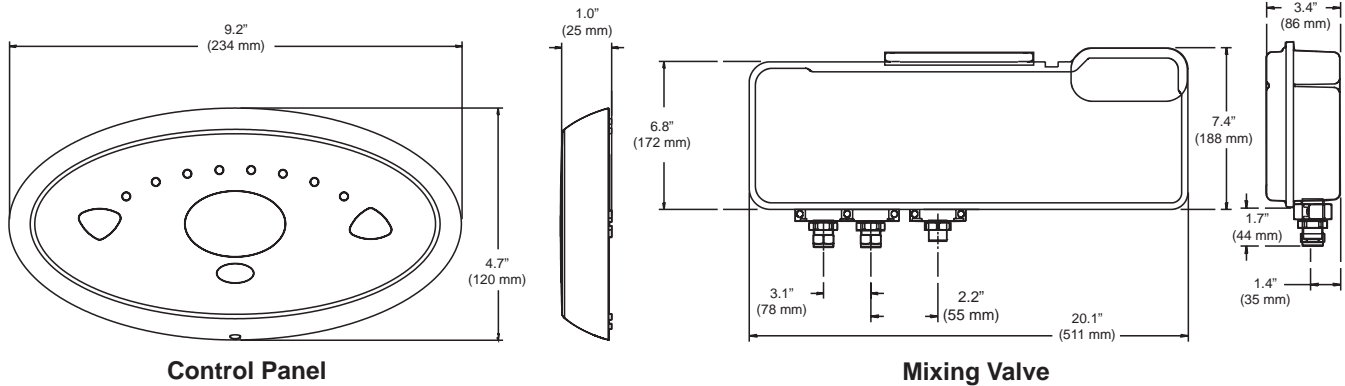

Sense™ Digital Mixing Valves												
Model	Pressure Drop (psi)										Min. Flow	C <sub>v</sub>
	5	10	15	20	25	30	35	40	45	50		
DMV1	3	4	5	6	6	7	7	8	9	9	1	1.2
DMV2												
DMV3	6	8	10	11	12	14	15	16	17	18	1.6	2.5
DMV23												

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.



# Water Temperature Control - Single Point of Use

## Digital

### Sense™ Model DMV2-Individual Shower Technical Specifications

#### Connections

- Inlet and outlet connections: 1/2" NPT

#### Materials

- Control panel cover: Chrome ABS
- Mixing unit enclosure: PC/ABS
- Integral components: DZR brass stainless steel and engineering plastic (Dezincification Resistant)

#### Temperatures

- Factory pre-set:  
Min 86°F (30°C), Max 106°F (41°C),  
Default 100°F (38°C)
- Programmable range:  
Min 86°F - 117°F (30°C - 47°C),  
Max 91°F - 122°F (33°C - 50°C),  
Default 86°F - 122°F (30°C - 50°C)  
Full cold can also be selected
- Minimum blend temperature differential from hot supply:  
5°F (2°C)
- Optimum thermostatic control range:  
86°F - 122°F (30°C - 50°C)
- Inlet Cold water range (recommended):  
34°F - 68°F (1°C - 20°C)
- Inlet Hot water range (recommended):  
122°F - 149°F (50°C - 65°C )  
185°F (85°C) during disinfection

#### Performance

- Thermal shutdown upon inlet supply failure
- +/- 2°F (+/- 1°C) delivery temperature stability
- Minimum flow rate at recommended supply conditions:  
1 GPM (4 LPM) at <72 psi maintained pressure  
1.6 GPM (6 LPM) at >72 psi maintained pressure.

#### Thermal Disinfection

- Factory Settings  
Min. Temperature: 140°F (60°C)  
Min. Time: 5 minutes
- Programmable Range  
Min. Temperature: 140 - 185°F (60 - 85°C)  
Min. Time: 0 - 50 minutes  
Reduced water flow during disinfection can be selected.

#### Environment

- Ambient temperature: 34°F - 104°F (1°C - 40°C)
- Maximum relative humidity: 95% non-condensing

#### Pressures

- Maximum static pressure: 145 psi (10 bar)
- Maximum inlet supply pressure differential: 3:1 (equal inlet pressures recommended)

#### IP Rating

- Control panel: IP45
- Overall valve enclosure: IP24
- Electronics compartment: IP45
- PSU: IP45

#### Electrical

- Supply Voltage: 120V 50-60Hz
- Maximum load: 20W at 12V DC
- Control panel cable length: 10 ft. (3m) supplied
- Maximum distance 20 ft. (6m)

#### Times - Factory settings

- Flow time: 15 seconds
- Service flush cycle: 2 minutes
- Service flush waiting period: 12 hours

#### Programmable range

- Flow time: 5 seconds - 60 minutes
- Service flush cycle: 1 minute - 59 minutes
- Service flush waiting period: 1 hour - 983 hours

#### Operation


- Temperature selector: Full no-touch temperature control
- Flow control: No-touch on/off - timed flow

#### Approvals

- ASSE 1016, CSA, UL

#### Shipping Weight

- 14.5 lbs

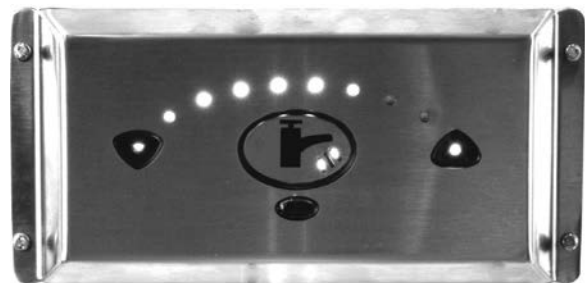

Optional Stainless Steel Control Panel Cover

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.