

DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:



Order:

Project:

Requirements:

By:

Date:

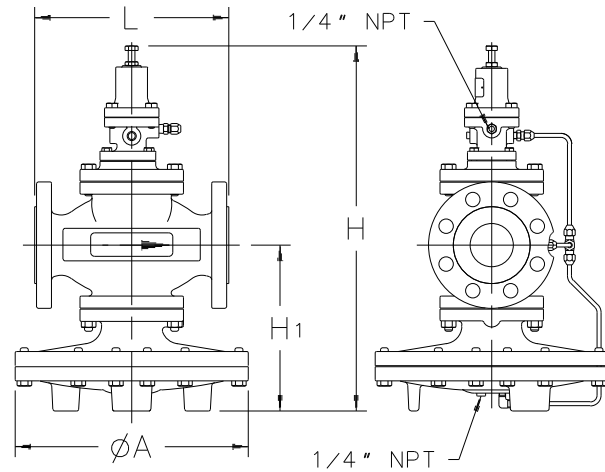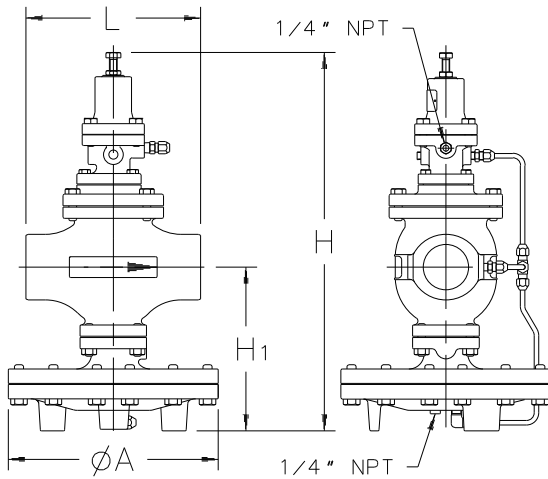

Dimensions & Weights

SIZE	L		A	F	H	H ₁	Weight		C _v [K _v]
	NPT	CL. 150					NPT	CL. 150	
1/2" [15]	5-15/16" [151mm]	—	7-15/16" [202mm]	6-15/16" [176mm]	15-3/4" [400mm]	6-3/4" [171mm]	34 lbs. [15 kgs.]	—	5 [4.3]
3/4" [20]	5-15/16" [151mm]	—	7-15/16" [202mm]	6-15/16" [176mm]	15-3/4" [400mm]	6-3/4" [171mm]	34 lbs. [15 kgs.]	—	7.2 [6.2]
1" [25]	6-5/16" [160mm]	—	8-15/16" [227mm]	7-1/8" [181mm]	15-15/16" [405mm]	6-15/16" [176mm]	44 lbs. [20 kgs.]	—	10.9 [9.4]
1-1/4" [32]	7-1/8" [181mm]	—	8-15/16" [227mm]	7-1/8" [181mm]	17-1/8" [435mm]	7-5/8" [194mm]	51 lbs. [23 kgs.]	—	14.3 [12.4]
1-1/2" [40]	7-1/8" [181mm]	—	8-15/16" [227mm]	7-1/8" [181mm]	17-1/8" [435mm]	7-5/8" [194mm]	51 lbs. [23 kgs.]	—	18.8 [16.3]
2" [50]	9-1/16" [230mm]	8-9/16" [217mm]	10-15/16" [278mm]	7-3/4" [197mm]	19-5/8" [498mm]	8-1/2" [216mm]	75 lbs. [34 kgs.]	81 lbs. [37 kgs.]	32 [27.7]
2-1/2" [65]	—	10-15/16" [278mm]	13-13/16" [351mm]	8-5/16" [211mm]	21-3/4" [552mm]	9-13/16" [249mm]	—	142 lbs. [64 kgs.]	60 [52]
3" [80]	—	11-3/4" [298mm]	13-13/16" [351mm]	8-3/4" [222mm]	22-5/8" [575mm]	10-7/16" [265mm]	—	155 lbs. [70 kgs.]	78 [67]
4" [100]	—	13-1/2" [343mm]	15-13/16" [402mm]	9-7/16" [240mm]	25-15/16" [659mm]	12-5/8" [321mm]	—	247 lbs. [112 kgs.]	120 [104]



Armstrong Pressure/Temperature Group
221 Armstrong Blvd.,
Three Rivers, MI. 49093
Armstrong (269) 279-3600 Fax(269) 273-8656
Posted on www.armstronginternational.com

Product

CD No.

Date

GP-2000L

2232

02/05/09

Rev. A

Specifications

Application	Inlet Pressure	Reduced Pressure	Spring Color Code	Maximum Temperature	Minimum Differential
Steam	NPT 5-15 psig [.3-1 bar]	2-12 psig [.1-.8 bar]	YELLOW	450 °F [232 °C]	3 psig [.2 bar]
	CL. 150 FLG. 5-15 psig [.3-1 bar]				

List Of Materials

Body	Ductile Iron ASTM A536
Main Valve	Stainless Steel AISI 420
Main Valve Seat	Stainless Steel AISI 420
Pilot Valve	Stainless Steel AISI 420
Pilot Valve Seat	Stainless Steel AISI 420
Diaphragm	Stainless Steel AISI 301
Bolting	Carbon Steel



Armstrong Pressure/Temperature Group
 221 Armstrong Blvd.,
 Three Rivers, MI. 49093
Armstrong (269) 279-3600 Fax(269) 273-8656
 Posted on www.armstronginternational.com

Product

CD No.

Date

02/05/09

GP-2000L

2232

Rev.

A